



Tiller Fitting

Cast in gunmetal and ready to fit an insert appropriate to your rudder stock.



Gunmetal	Between Straps	Length Overall
1909/GM	1 ⁵ / ₁₆ " 35mm	8" 200mm



NEW

Gallows

Gunmetal	Item	Tube Size
9592/GM/32	8 ¹ / ₄ " Frame	1 ¹ / ₄ " 32mm
9592/GM/SKT/32	Small Socket	1 ¹ / ₄ " 32mm
9592/GM/39	9 ¹ / ₂ " Frame	1 ¹ / ₂ " 39mm
9592/GM/SKT/39	Large Socket	1 ¹ / ₂ " 39mm



Boom Crutch Sockets

Gunmetal	Galvanised	Base Dims.	Inside Dims.
9591/GM	9591/GA	5 ³ / ₈ " x 2 ³ / ₄ " 137 x 68mm	2 ¹ / ₂ " x 1" 64 x 25mm




Bronze Centreboard Winch

Drum Diameter	8 ³ / ₄ "	220mm
Shaft Diameter	1 ³ / ₁₆ "	22mm
Base Jaw Width	2 ⁷ / ₈ "	72mm
Base Jaw Length	6 ¹ / ₄ "	158mm
Power Advantage	10:1	

Part No. 3769/GM

Keel or Rubbing Band

Available in brass or galvanised iron with feather edge rather than the thicker half round style. Supplied in lengths of approximately 3 metres.

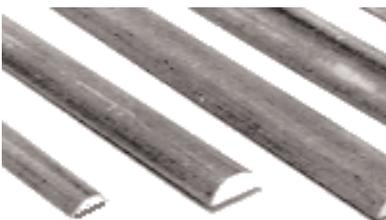

Brass	Width	Thickness
5081/BR/010	3 ³ / ₈ " 10mm	1 ¹ / ₈ " 3mm
5081/BR/012	1 ¹ / ₂ " 12mm	1 ¹ / ₈ " 3mm
5081/BR/015	5 ⁵ / ₈ " 15mm	3 ³ / ₁₆ " 5mm
5081/BR/019	3 ³ / ₄ " 20mm	3 ³ / ₁₆ " 5mm
5081/BR/025	1" 25mm	3 ³ / ₁₆ " 5mm
Galvanised		
5087/GA/019	3 ³ / ₄ " 20mm	1 ¹ / ₄ " 6mm
5087/GA/025	1" 25mm	1 ¹ / ₄ " 6mm
5087/GA/031	1 ¹ / ₄ " 32mm	1 ¹ / ₄ " 6mm
5087/GA/037	1 ¹ / ₂ " 38mm	1 ¹ / ₄ " 6mm
5087/GA/050	2" 50mm	3 ³ / ₈ " 10mm