



**Portlights**  
**Deck Prisms**  
**Cleats**  
**Bollards**  
**Fairleads**  
**Stanchions**  
**Keel Band**  
**Flagstaff Sockets**

**Ventilators**  
**Chain Pipes**  
**Deck Screws**  
**Rowlocks**  
**Boathooks**  
**Rudder Gear**  
**Stem Fittings**  
**Fender Eyes**




# Deck Hardware & Exterior Fittings



## Polished Bronze Portlights

These heavy duty Davey portlights are traditionally hand made in England to the highest quality and CE approved for upper hull areas and cabin sides. Supplied with outside finishing rings they are fitted with toughened glass and have a polished finish. The 8" round opening and all three oval opening portlights have two closures for additional security. Chrome plate finish and reduced spigot lengths are available to special order.

3035

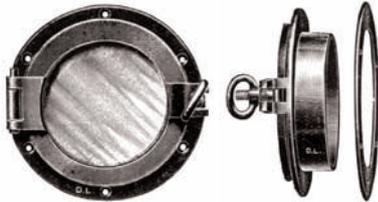


### Round Opening

### New Deeper Spigots

Gunmetal	Glass Diameter	Flange Diameter	Spigot Diameter	Spigot Depth
3035/GM/100	4" 100mm	6½" 170mm	5¼" 134mm	1⅜" 34mm
3035/GM/125	5" 125mm	7¾" 195mm	5¾" 146mm	1¼" 44mm
3035/GM/150	6" 150mm	9⅛" 230mm	6⅞" 175mm	1¼" 44mm
3035/GM/200	8" 200mm	12" 310mm	10" 250mm	2" 52mm

3036



### Round Fixed

### New Deeper Spigots

Gunmetal	Glass Diameter	Flange Diameter	Spigot Diameter	Spigot Depth
3036/GM/100	4" 100mm	6⅞" 167mm	4⅞" 123mm	1⅜" 35mm
3036/GM/125	5" 125mm	7⅞" 195mm	5¾" 146mm	1¼" 44mm
3036/GM/150	6" 150mm	9⅛" 222mm	6⅞" 175mm	1¼" 44mm
3036/GM/200	8" 200mm	12" 310mm	10" 250mm	2" 52mm


3033



### Oval Opening


Gunmetal	Glass Size	Flange Size	Spigot Size	Spigot Depth
3033/GM/168	6⅞" x 3¾" 165 x 93mm	9¼" x 7" 250 x 180mm	8" x 5¼" 203 x 132mm	1¼" 32mm
3033/GM/218	8½" x 4⅞" 218 x 125mm	11¼" x 8⅞" 300 x 206mm	9¾" x 6⅞" 248 x 155mm	1⅞" 28mm
3033/GM/275	11" x 6¼" 280 x 160mm	14¼" x 9¼" 362 x 248mm	12⅞" x 7⅞" 308 x 187mm	1¼" 32mm

3039



### Oval Fixed

Gunmetal	Glass Size	Flange Size	Spigot Size	Spigot Depth
3039/GM/168	6⅞" x 4" 175 x 100mm	8⅞" x 6" 225 x 150mm	7½" x 4⅞" 192 x 117mm	1¼" 32mm
3039/GM/218	8½" x 4⅞" 215 x 125mm	10½" x 6⅞" 270 x 175mm	9⅞" x 5⅞" 238 x 143mm	1¼" 32mm
3039/GM/275	10¾" x 6" 272 x 150mm	14⅞" x 9¼" 358 x 237mm	12" x 7⅞" 304 x 182mm	1¾" 45mm



## Ships Portlights

We are also able to supply larger portlights in steel or brass, either single or double opening.



## Lightweight Portlight Frames

Cast in brass with a polished finish, these frames are ideal for inland craft, interior vision panels and many other applications where full portlight standards are not required. Supplied without glass unless requested.



Section Through Frame




Brass	Inside Diameter		Outside Diameter	
2424/BR/070	2¾"	70mm	5"	125mm
2424/BR/150	6"	150mm	9"	230mm
2424/BR/185	7¼"	185mm	10"	254mm
2424/BR/200	8"	200mm	11¼"	285mm
2424/BR/230	9"	230mm	11¾"	300mm
2424/BR/280	11"	280mm	14½"	370mm

## Deck Prisms

From the early 1900s, Davey & Company has been producing a range of deck prisms to bring natural light down below, transforming the darkest of cabins. Manufactured in England these prisms are solid glass with bronze deep frames, suitable for thinner decks, or flat frames for when the glass is rabbetted into thicker decks first. Frames are also available chrome plated or in polished stainless steel.

### 2411 Rabetted




Gunmetal	Glass Size	Overall Size	Depth
2411/GM/225/075	9" x 3" 229 x 75mm	10¼" x 4⅞" 260 x 124mm	2¼" 57mm
2411/GM/250/087	10" x 3½" 254 x 89mm	11⅜" x 5⅝" 290 x 137mm	2¼" 57mm
2411/GM/312/112	12½" x 4½" 318 x 114mm	14½" x 6½" 368 x 165mm	2½" 64mm

### 2414 Deep Frame



Gunmetal	Glass Size	Overall Size	Depth
2414/GM/225	9" x 3" 229 x 75mm	11" x 5" 279 x 127mm	2" 50mm
2414/GM/250	10" x 3½" 254 x 89mm	12¼" x 5¾" 311 x 146mm	2¼" 57mm
2414/GM/300	12" x 4" 305 x 100mm	14½" x 6½" 368 x 165mm	2½" 64mm

### 2412 Round Prism



Gunmetal	Glass Diameter		Overall Diameter		Depth
2412/GM/162	4⅞"	112mm	6⅞"	156mm	¾" 19mm
2412/GM/194	5½"	140mm	7⅞"	190mm	¾" 19mm
2412/GM/250	8"	200mm	10"	250mm	¾" 19mm

### 2413 Melon



Gunmetal	Glass Diameter	Overall Diameter	Depth
2413/GM	5½"	140mm	7½" 190mm

### 2417 Bulls Eye-Deep Frame



Gunmetal	Glass Diameter	Overall Diameter	Depth
2417/GM/206/COM	6"	150mm	8⅞" 206mm
2417/GM/260/COM	8"	200mm	10¼" 260mm



# Deck Hardware & Exterior Fittings

## Mushroom Ventilators

Manufactured in gunmetal, we produce low profile vents for the coach roof and higher patterns for areas that could become awash. The high patterns have a through deck spigot and inner neoprene seal for added water protection and all vents have a 'T' handle for opening and closing.

### 2454 Low Pattern



Gunmetal	Inside Diameter		Flange Diameter		Closed Height		Fastenings
2454/GM/075	3"	75mm	4½"	105mm	1¾"	35mm	No. 8
2454/GM/100	4"	100mm	5½"	140mm	1¾"	35mm	No. 8
2454/GM/125	5"	125mm	6¾"	175mm	1¾"	45mm	No. 8

### 2453 High Pattern



Gunmetal	Inside Diameter		Flange Diameter		Closed Height		Fastenings
2453/GM/075	3"	75mm	5½"	140mm	¾"	82mm	No. 10
2453/GM/100	4"	100mm	6¾"	170mm	¾"	95mm	No. 12
2453/GM/125	5"	125mm	7¾"	197mm	4"	100mm	No. 12
2453/GM/150	6"	150mm	8½"	216mm	5¼"	133mm	No. 12

## Glazed Gunmetal Ventilator

A versatile vent with two glazed segments in the top admitting both light and air to the cabin. Fitted with 'T' handle.



Gunmetal	Inside Diameter		Flange Diameter		Closed Height		Fastenings
2452/GM	4½"	114mm	7"	178mm	2⅝"	60mm	No. 10

## Shell Ventilator


This attractive vent is especially popular for ventilating the engine area.



Gunmetal	Width		Length		Height		Fastenings
2467/GM/01	4¾"	122mm	6"	150mm	2⅝"	65mm	No. 8
2467/GM/02	6⅝"	163mm	7½"	190mm	2¾"	70mm	No. 8

## Half Cowl Ventilator

Cast from gunmetal, these vents are designed to fit to the sides of engine compartments. They are usually fitted in pairs, but are listed separately so that either port or starboard may be supplied individually.



Port	Starboard	Height	Width	Depth	Fastenings
2475/GM/LH	2475/GM/RH	5½" 140mm	3½" 90mm	2½" 65mm	No. 4

# Deck Hardware & Exterior Fittings



## Spun Cowl Ventilator



Manufactured from spun brass or stainless steel complete with polished bronze or stainless steel base and blanking cap. Vent can be locked in any direction.

Brass	Stainless Steel	Internal Diameter	Flange Diameter	Height	Cowl Diameter
2477/BR/075	2477/SS/075	3" 75mm	4 $\frac{3}{8}$ " 117mm	9 $\frac{1}{4}$ " 235mm	6 $\frac{1}{4}$ " 160mm
2477/BR/100	2477/SS/100	4" 100mm	5" 125mm	11 $\frac{1}{4}$ " 286mm	8 $\frac{1}{2}$ " 216mm
2477/BR/125	2477/SS/125	5" 125mm	7 $\frac{5}{16}$ " 185mm	14 $\frac{3}{4}$ " 375mm	9 $\frac{7}{8}$ " 250mm

## Cast Cowl Ventilator



Available in polished brass or chrome finish, these cast vents are supplied with matching raised deck fittings. Blanking caps are available as an optional extra.

Brass	Chrome	Internal Diameter	Flange Diameter	Height	Cowl Diameter
5400/BR	5400/CP	2 $\frac{1}{2}$ " 63mm	4 $\frac{1}{2}$ " 115mm	8 $\frac{5}{8}$ " 220mm	5 $\frac{1}{8}$ " 130mm
Blanking Caps		Brass	5401/BR	Chrome	5401/CP

## Deck Screws

Heavy duty cast brass without spigot, polished finish. Available chrome plated to order. Supplied with key.



Brass	Aperture	Diameter	Fastenings
2430/BR/050	2" 50mm	3 $\frac{3}{8}$ " 92mm	No. 8
2430/BR/062	2 $\frac{1}{2}$ " 64mm	4 $\frac{1}{4}$ " 108mm	No. 8
2430/BR/075	3" 75mm	4 $\frac{3}{4}$ " 120mm	No. 8
2430/BR/100	4" 100mm	6 $\frac{1}{2}$ " 165mm	No. 8
2430/BR/150	6" 150mm	8 $\frac{1}{2}$ " 215mm	No. 10
2430/BR/200	8" 200mm	10 $\frac{5}{8}$ " 270mm	No. 10

Heavy duty cast brass with BSP threaded spigot, polished finish. Available chrome plated to order. Supplied with key..



Brass	BSP Thread	Diameter	Fastening
2433/BR/037	1 $\frac{1}{2}$ "	3 $\frac{3}{8}$ " 93mm	No. 8
2433/BR/050	2"	4 $\frac{1}{4}$ " 110mm	No. 8
2433/BR/062	2 $\frac{1}{2}$ "	5" 125mm	No. 8
2433/BR/075	3"	5 $\frac{5}{8}$ " 144mm	No. 8
2433/BR/100	4"	7" 180mm	No. 8

Polished brass or chrome plated, marked 'diesel' or 'water' on the cap. The spigot takes flexible tubing and is long enough for double clamping.



Brass	Chrome	Legend	Hose Size	Fastenings
0701/BR/36	0701/CP/36	Diesel	1 $\frac{1}{2}$ " 38mm	No. 8
0701/BR/52	0701/CP/52	Diesel	2" 50mm	No. 8
0702/BR	0702/CP	Water	1 $\frac{1}{2}$ " 38mm	No. 8

## Brass Nameplates



NEW

9523/BR/DIESEL	Diesel Nameplate
9523/BR/WATER	Water Nameplate



## Fuel Tank Vent

Brass finish or chrome plated. **NEW**

Brass	Chrome
2435/BR	2435/CP
For $\frac{5}{8}$ " / 16mm hose	



# Deck Hardware & Exterior Fittings

## Cleats

Davey & Co. produce a wide range of bronze and galvanised cleats. The items on these pages are those currently in production, but other patterns and sizes are available to special order. Please enquire if the item you need is not shown here. Most gunmetal items can be chrome plated on request.

1084 Pillar Cleat



Gunmetal	Galvanised	Length		Base Width		Fastenings	
1084/GM/100	1084/GA/100	4"	100mm	7/8"	22mm	3/16"	5mm
1084/GM/125	1084/GA/125	5"	125mm	1"	25mm	1/4"	6mm
1084/GM/150	1084/GA/150	6"	150mm	1 1/8"	28mm	1/4"	6mm
1084/GM/200	1084/GA/200	8"	200mm	1 3/8"	36mm	5/16"	8mm
1084/GM/250	1084/GA/250	10"	250mm	1 5/8"	40mm	5/16"	8mm

1073 Jamb Cleat



Gunmetal	Length		Base Width		Fastenings
1073/GM/075	3"	75mm	5/8"	16mm	No. 6 screw
1073/GM/100	4 1/8"	105mm	3/4"	19mm	No. 8 screw
1073/GM/125	5"	125mm	1"	25mm	No. 10 screw
1073/GM/150	6"	150mm	1"	25mm	No. 12 screw
1073/GM/175	7"	175mm	1"	25mm	No. 14 screw

1077 Flat Top Cleat



Gunmetal	Galvanised	Length		Base Width		Fastenings
1077/GM/100	1077/GA/100	4"	100mm	1 1/4"	32mm	No. 8 screw
1077/GM/125	1077/GA/125	5"	125mm	1 1/2"	38mm	No. 8 screw
1077/GM/150	1077/GA/150	5 7/8"	150mm	1 5/8"	40mm	No. 10 screw

1078 Open Top Cleat



Gunmetal	Length		Base Width		Fastenings	
1078/GM/100	4"	100mm	7/8"	22mm	3/16"	5mm
1078/GM/125	5"	125mm	1"	25mm	1/4"	6mm
1078/GM/150	6"	150mm	1 1/8"	28mm	1/4"	6mm
1078/GM/175	7"	175mm	1 1/4"	32mm	5/16"	8mm

1089/BR/048



Part No.	Length		Base Width		Max. Line Size	Fastenings
1089/BR/048	1 1/8"	48mm	3/4"	19mm	6mm	No. 6 screw
1089/GM/LH/081	3 1/4"	82mm	7/8"	22mm	10mm	No. 8 screw
1089/GM/LH/087	3 1/2"	89mm	7/8"	22mm	12mm	No. 8 screw
1089/GM/RH/081	3 1/4"	82mm	7/8"	22mm	10mm	No. 8 screw
1089/GM/RH/087	3 1/2"	89mm	7/8"	22mm	12mm	No. 8 screw

1089 Tubular Jamb Cleat



The 3/4" and 3 1/2" cleats are available in left or right hand.  
The 1 1/8" is forged brass and the rope is cleated from the top.

1070 Horn Cleat



Gunmetal	Length		Base Width		Fastenings
1070/GM/075	3 3/8"	79mm	7/8"	22mm	No. 6 screw (x2)
1070/GM/100	4"	100mm	1 1/8"	28mm	No. 8 screw (x2)
1070/GM/150	6"	150mm	1 1/4"	32mm	No. 8 screw (x4)
1075/GM/100	4"	100mm	1 3/8"	35mm	No. 8 screw (x2)
1075/GM/125	5"	125mm	1 5/8"	42mm	No.10 screw (x2)
1075/GM/150	5 3/4"	148mm	2"	50mm	No.10 screw (x4)

1075 Tall Horn Cleat



The 1075 pattern is much heavier duty than the 1070 pattern.  
Some of the horn cleats are also available in galvanised iron.

# Deck Hardware & Exterior Fittings




1098 Torpedo Cleat



Gunmetal	Head Length	Base Length	Base Width	Fastenings
1098/GM/087	3½" 89mm	2⅞" 73mm	1¼" 32mm	No. 6 screw
1098/GM/112	4½" 114mm	4⅞" 112mm	1½" 38mm	No. 8 screw
1098/CP/087	3½" 89mm	2⅞" 73mm	1¼" 32mm	No. 6 screw
1098/CP/112	4½" 114mm	4⅞" 112mm	1½" 38mm	No. 8 screw

Also available with a smaller head in relation to the base, in CP only.


1086 Thames Cleat

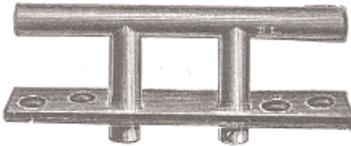

Gunmetal	Horn Length	Base Dimensions	Fastenings
1086/GM/150	6" 150mm	5" x 1¾" 125mm x 45mm	⅜" 5mm
1086/GM/200	8" 200mm	7" x 2¼" 175mm x 56mm	⅝" 8mm

Please note a 10" size is also available to special order.


1088 Bar Cleat – Bolt Through



Gunmetal	O.A. Height Above Base Plate	Base Dimensions	Bolt Size
1088/GM/162	2½" 64mm	6½" x 2¼" 165mm x 57mm	4" x ⅞" 100mm x 11mm
1088/GM/238	3¼" 82mm	9½" x 2½" 241mm x 64mm	6" x ⅝" 150mm x 16mm

Please note that the oval teak bar is not supplied with this item.


1099 Bar Cleat – Screw Down



Gunmetal	O.A. Height	Base Dimensions	Fasteners
1099/GM	2½" 64mm	2⅞" x 1½" 73mm x 38mm	⅜" 5mm

Please note that the oval teak bar is not supplied with this item. Brackets are sold singularly, therefore two need to be ordered to make one cleat.

**NEW**



1091



1092



1093

## Tufnol Cleats

Strong, lightweight and resistant to the marine environment, these genuine Tufnol cleats will give excellent service for many years.

	Type	Length
1091/00/105	Jamming Cleat with base	4¼" 107mm
1091/00/135	Jamming Cleat with base	5" 125mm
1091/00/150	Jamming Cleat without base	6" 150mm
1091/00/200	Double Cleat	8" 200mm
1091/00/280	Double Cleat	11" 280mm

## Wooden Cleats

In teak or varnished ash, these cleats add warmth and style to any vessel. Larger sizes up to 20" are also available to special order.



Ash	Teak	Length	Base Width
1097/AH/100	1097/TK/100	4" 100mm	⅝" 16mm
1097/AH/125	1097/TK/125	5" 125mm	¾" 19mm
1097/AH/150	1097/TK/150	6" 150mm	¾" 19mm
1097/AH/200	1097/TK/200	8" 200mm	⅝" 24mm
1097/AH/250	1097/TK/250	10" 150mm	1¼" 32mm
1097/AH/300	1097/TK/300	12" 300mm	1½" 38mm



## Deck Hardware & Exterior Fittings


### Bollard Cleats

1079



Gunmetal	Galvanised	Length		Base Dia.		Fastenings	
1079/GM/125	1079/GA/125	5"	125mm	2½"	65mm	¼"	6mm
1079/GM/150	1079/GA/150	6"	150mm	3½"	90mm	¼"	6mm
1079/GM/187	1079/GA/187	7½"	187mm	4¾"	120mm	⅝"	8mm
1079/GM/225	1079/GA/225	9"	225mm	5"	125mm	⅝"	8mm

1080



Gunmetal	Galvanised	Length		Base Dia.		Bolt Size
1080/GM/100	1080/GA/100	4"	100mm	2¼"	57mm	3½" x 7/16" 89mm x 11mm
1080/GM/125	1080/GA/125	5"	125mm	2⅝"	67mm	4" x ½" 100mm x 12mm
1080/GM/150	1080/GA/150	6"	150mm	2¾"	70mm	4¼" x ½" 108mm x 12mm

1081



Gunmetal	Galvanised	Length		Base Dia.		Fastenings
1081/GM/062	-	2½"	62mm	2"	50mm	No. 8 screw
1081/GM/100	1081/GA/100	4"	100mm	2¾"	70mm	No.10 screw
1081/GM/125	1081/GA/125	5"	125mm	3"	75mm	⅜" 5mm
1081/GM/150	1081/GA/150	6"	150mm	3¼"	83mm	¼" 6mm

1082



Part Number		Length		Base Dia.		Bolt Size
1082/GM/150	Galvanised	6"		3⅝"		4½" x ⅜"
		150mm		85mm		115mm x 10mm
1082/GM/150	Gunmetal	6"		3⅝"		4½" x ½"
1082/CP/150	Chrome	150mm		85mm		115mm x 12mm

This relatively new addition to the Davey range allows for the security of both bolt and screw fixing on the same cleat.

1150



### Mooring Bitt

Gunmetal	Arm Length	Base Dimensions	Height	Fastenings
1150/GM	6½"	5" x 5" 125mm x 125mm	4⅝" 105mm	⅝" 8mm



## Bollards


Davey bollards come in a variety of shapes and sizes, in both polished gunmetal and galvanised iron. In addition to those shown here, we have a selection of other sizes and patterns available for casting to special order. Please enquire if the item, or size, you need is not shown here.

1137




Gunmetal	Galvanised	Arm Length	Base Dimensions	Height	Fastenings
1137/GM/118	1137/GA/118	4 <sup>5</sup> / <sub>8</sub> " 117mm	5" x 3 <sup>3</sup> / <sub>4</sub> " 125mm x 95mm	5" 125mm	1/4" 6mm
1137/GM/150	1137/GA/150	6 <sup>1</sup> / <sub>4</sub> " 159mm	5 <sup>7</sup> / <sub>8</sub> " x 4 <sup>5</sup> / <sub>8</sub> " 149mm x 117mm	7" 178mm	5/16" 8mm
1137/GM/187	1137/GA/187	7 <sup>1</sup> / <sub>2</sub> " 190mm	7" x 5 <sup>1</sup> / <sub>2</sub> " 178mm x 140mm	8 <sup>3</sup> / <sub>4</sub> " 210mm	3/8" 10mm

1138




Part Number		Length	Height	Base L x W	Fastenings
1138/GM/220	Gunmetal	8 <sup>1</sup> / <sub>2</sub> "	4 <sup>3</sup> / <sub>8</sub> "	7" x 2 <sup>3</sup> / <sub>4</sub> "	1/4"
1138/BR/220	Brass	220mm	110mm	180 x 70mm	6mm
1138/GA/360	Galvanised	14 <sup>1</sup> / <sub>4</sub> " 360mm	8 <sup>1</sup> / <sub>2</sub> " 215mm	12" x 4 <sup>1</sup> / <sub>2</sub> " 300 x 115mm	3/8" 10mm

1127 Raked 12"




Gunmetal	Galvanised	Length	Base Dimensions	Fastenings
1127/GM/300	1127/GA/300	12" 300mm	11 <sup>3</sup> / <sub>8</sub> " x 3 <sup>1</sup> / <sub>2</sub> " 290mm x 89mm	3/8" 10mm
1127/GM/450	1127/GA/450	18" 457mm	18" x 5 <sup>1</sup> / <sub>2</sub> " 457mm x 140mm	1/2" 12mm

1127




This bollard is also available in 24" to special order. Please note that the 12" version has raked pillars and the 18" and 24" are upright.

1126

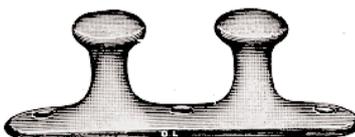

Gunmetal	Galvanised	Length	Base Width	Fastenings
1126/GM/100	1126/GA/100	4" 100mm	1 <sup>1</sup> / <sub>16</sub> " 28mm	3/16" 5mm
1126/GM/150	1126/GA/150	6" 150mm	1 <sup>1</sup> / <sub>2</sub> " 38mm	1/4" 6mm
1126/GM/200	1126/GA/200	8" 200mm	1 <sup>1</sup> / <sub>8</sub> " 48mm	3/16" 8mm
1126/GM/250	1126/GA/250	10" 250mm	2 <sup>1</sup> / <sub>4</sub> " 57mm	3/16" 8mm

1132



The 1132 high pattern bollard is also available to special order in sizes 13", 15" and 18", in both gunmetal and galvanised iron.




# Deck Hardware & Exterior Fittings


## Deck Fairleads

Davey & Company produce a wide range of fairleads in both gunmetal and galvanised iron. In addition to those shown here, we have other patterns available for casting to special order. Most gunmetal items can be chrome plated on request.

1111 Straight Fairlead

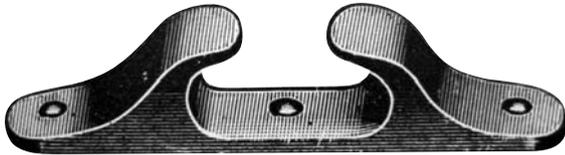

1112 Handed Fairlead

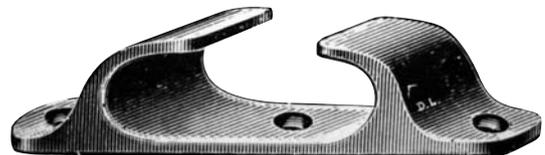

## Straight Pattern

Gunmetal	Galvanised	Length		Width		Aperture		Fastenings
1111/GM/100	1111/GA/100	4"	100mm	7/8"	22mm	1 3/8" x 5/8"	35 x 16mm	No. 8
1111/GM/125	1111/GA/125	5"	125mm	1"	25mm	1 7/8" x 3/4"	48 x 20mm	No. 10
1111/GM/150	1111/GA/150	6"	150mm	1 1/16"	30mm	2 1/4" x 1 5/16"	57 x 24mm	No. 12
1111/GM/175	-	7"	175mm	1 3/8"	34mm	2 1/2" x 1"	64 x 25mm	No. 14
1111/GM/200	1111/GA/200	8"	200mm	1 3/8"	35mm	2 7/8" x 1 1/8"	74 x 30mm	6mm
1111/GM/225	-	9"	228mm	1 1/2"	38mm	3 3/4" x 1 1/4"	82 x 31mm	8mm
1111/GM/250	1111/GA/250	10"	255mm	1 3/4"	45mm	3 3/4" x 1 1/2"	97 x 35mm	8mm
1111/GM/300	1111/GA/300	12"	300mm	2 1/16"	55mm	4 1/2" x 2"	115 x 50mm	8mm

We can also produce larger, heavy duty straight fairleads 14" to 24". Part No. 1104.

## Handed Pattern - Gunmetal

Left Hand	Right Hand	Length		Width		Aperture		Fastenings
1112/GM/LH/100	1112/GM/RH/100	4"	100mm	3/4"	19mm	1 1/8" x 5/8"	28 x 16mm	No. 8
1112/GM/LH/125	1112/GM/RH/125	5"	127mm	1"	25mm	1 1/2" x 3/4"	38 x 20mm	No. 10
1112/GM/LH/150	1112/GM/RH/150	6"	150mm	1 1/4"	32mm	1 3/4" x 7/8"	44 x 22mm	No. 12
1112/GM/LH/200	1112/GM/RH/200	8"	203mm	1 1/2"	37mm	2 1/2" x 1 1/4"	64 x 32mm	6mm
1112/GM/LH/225	1112/GM/RH/225	9"	228mm	1 1/2"	38mm	2 7/8" x 1 3/8"	73 x 34mm	8mm
1112/GM/LH/250	1112/GM/RH/250	10"	255mm	1 7/8"	48mm	3 1/4" x 1 1/2"	83 x 38mm	8mm
1112/GM/LH/300	1112/GM/RH/300	11 3/4"	300mm	2 3/8"	55mm	3 3/4" x 1 7/8"	95 x 48mm	8mm
1112/GM/LH/350	1112/GM/RH/350	14"	360mm	2 3/4"	70mm	4 1/2" x 2 1/2"	114 x 64mm	12mm

## Handed Pattern - Galvanised

Left Hand	Right Hand	Length		Width		Aperture		Fastenings
1112/GA/LH/100	1112/GA/RH/100	4"	100mm	3/4"	19mm	1 1/8" x 5/8"	28 x 16mm	No. 8
1112/GA/LH/125	1112/GA/RH/125	5"	127mm	1"	25mm	1 1/2" x 3/4"	38 x 20mm	No. 10
1112/GA/LH/150	1112/GA/RH/150	6"	150mm	1 1/4"	32mm	1 3/4" x 7/8"	44 x 22mm	No. 12
1112/GA/LH/200	1112/GA/RH/200	8"	203mm	1 1/2"	37mm	2 1/2" x 1 1/4"	64 x 32mm	6mm
1112/GA/LH/250	1112/GA/RH/250	10"	255mm	1 7/8"	48mm	3 1/4" x 1 1/2"	83 x 38mm	8mm
1112/GA/LH/300	1112/GA/RH/300	11 3/4"	300mm	2 3/8"	55mm	3 3/4" x 1 7/8"	95 x 48mm	8mm
1112/GA/LH/350	1112/GA/RH/350	14"	360mm	2 3/4"	70mm	4 1/2" x 2 1/2"	114 x 64mm	12mm

1102 Closed Fairlead



Gunmetal	Length		Width	Aperture	Fastenings
1102/GM/100	4"	100mm	1/16" 18mm	1 3/8" x 5/8" 35mm x 15mm	No. 8 (x2)
1102/GM/150	6"	150mm	5/16" 24mm	2" x 7/8" 50mm x 22mm	No. 10 (x2)
1102/GM/200	8"	200mm	1 3/8" 35mm	3 1/2" x 1 1/16" 90mm x 28mm	No. 14 (x4)

# Deck Hardware & Exterior Fittings




1109 Straight Lipped Fairlead



Gunmetal	Length	Width	Aperture	Fastenings
1109/GM/100	4" 100mm	7/8" 22mm	1 3/8" x 1/2" 35 x 13mm	No. 8
1109/GM/150	6" 150mm	1" 25mm	2" x 7/8" 50 x 22mm	No. 8
1109/GM/200	8" 203mm	1 1/2" 38mm	3" x 1 1/8" 75 x 30mm	No. 12

**Gunmetal**

1113 Handed Lipped Fairlead

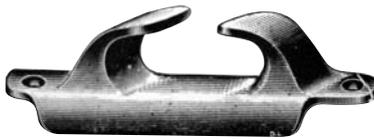

Left Hand	Right Hand	Length	Width	Aperture	Fastenings
1113/GM/LH/100	1113/GM/RH/100	4" 100mm	7/8" 22mm	1 1/4" x 5/8" 32 x 16mm	No. 8
1113/GM/LH/150	1113/GM/RH/150	6" 150mm	1" 25mm	2" x 7/8" 50 x 22mm	No. 8
1113/GM/LH/200	1113/GM/RH/200	8" 203mm	1 1/4" 32mm	2 1/2" x 1 1/8" 65 x 28mm	No. 14

**Gunmetal**

1115 Lock Over Handed Lipped Fairlead



Left Hand	Right Hand	Length	Width	Aperture	Fastenings
1115/GM/LH/100	1115/GM/RH/100	4" 100mm	7/8" 22mm	1 3/4" x 5/8" 45 x 16mm	No. 8
1115/GM/LH/150	1115/GM/RH/150	6" 150mm	1 1/4" 32mm	2" x 7/8" 50 x 22mm	No. 10
1115/GM/LH/165	1115/GM/RH/165	7" 180mm	1 1/4" 32mm	2 1/4" x 1" 57 x 25mm	No. 12
1115/GM/LH/200	1115/GM/RH/200	8" 205mm	1 1/2" 38mm	2 3/4" x 1 1/8" 70 x 28mm	No. 14

**NEW**

1120 & 1121 Straight Sunken Fairlead



Gunmetal	Length	Width	Aperture	Fastenings
1120/GM/200	8" 203mm	1" 25mm	3 3/4" x 1 1/4"	No. 12
1121/GM/200	8" 203mm	1 1/2" 38mm	95 x 32mm	No. 14
Galvanised 1121/GA/200	8" 203mm	1 1/2" 38mm	3 3/4" x 1 1/4" 95 x 32mm	No. 14

1122 Handed Sunken Fairlead



Left Hand	Right Hand	Length	Width	Aperture	Fastenings
Gunmetal 1122/GM/LH/200	Gunmetal 1122/GM/RH/200	9"	1 1/2"	3 3/8" x 1 1/4"	No.14
Galvanised 1122/GA/LH/200	Galvanised 1122/GA/RH/200	228mm	38mm	79 x 32mm	

1124 Semi Sunk Fairlead



**NEW**

Gunmetal	Length	Width	Aperture	Fastenings
1124/GM/180	7 1/4" 184mm	1 1/4" 31mm	2 1/16" x 1 1/2" 54 x 34mm	No.12

1107 Fairlead with Roller



Gunmetal	Galvanised	Length	Width	Aperture	Fastenings
1107/GM/300	1107/GA/300	12 1/4" 310mm	2 3/4" 70mm	4 1/2" x 2 1/4" 115 x 55mm	16mm
1107/GM/400	1107/GA/400	16" 405mm	3 3/4" 83mm	6 1/4" x 2 3/4" 160 x 70mm	18mm



# Deck Hardware & Exterior Fittings

## Windscreen Fittings

The set consists of one centre and one pair of side brackets cast in gunmetal and chrome plated. Supplied without glass.



	Centre Bracket Height	Side Bracket Height
8750/CP/222	9 <sup>3</sup> / <sub>8</sub> " 238mm	3 <sup>1</sup> / <sub>2</sub> " 89mm
8750/CP/287	12" 300mm	3 <sup>1</sup> / <sub>2</sub> " 89mm

## Sheet Leads

Polished gunmetal leads to pass sheets and control lines along side decks or through cockpit coamings etc.



9401



9412



9408

Gunmetal	Internal Dia	Width Overall	Height Overall
9401/GM	1/2" 12mm	1 1/8" 41mm	1 1/2" 38mm
9408/GM	5/8" 16mm	2 1/4" 58mm	1" 25mm
9412/GM	5/8" 16mm	2" 50mm	2 5/8" 54mm


## Bronze U-Bolts & Lignum Vitae Sheet Leads

Lignum Vitae bullseyes secured with phosphor bronze U-bolts or gunmetal screwdown bindings. The U-bolts are also available for use on their own.

NEW



9400



9402




9404


U-Bolt only	9400/PB/06	9400/PB/08
U-Bolt Sheet Lead	9402/PB/12	9402/PB/16
Screwdown Sheet Lead	9400/GM/12	9400/GM/16
U-Bolt Stud Length	1 3/4" 44mm	2" 50mm
U-Bolt Size	1/4" 6mm	5/16" 8mm
Bullseye Hole Size	1/2" 12mm	5/8" 16mm

## Coaming Leads

These leads, which are cast in gunmetal and then polished, are invaluable for passing lines through coamings. The two sheaved variety is designed for applications where the required lead is obliquely through the coaming.



9415




9416

Gunmetal	No of Sheaves	Max Rope	Size Overall	Coaming Thickness
9415/GM/012/019	1	8mm	2 3/4" x 1 5/8" 70 x 41mm	1/2" 12mm
9415/GM/016/031	1	10mm	3 7/16" x 2" 87 x 50mm	5/8" 15mm
9416/GM/012/019	2	8mm	4" x 1 1/16" 100 x 40mm	1/2" 12mm
9416/GM/016/031	2	10mm	5" x 2" 125 x 50mm	5/8" 15mm



## Chain Pipes


Traditional curved pattern chain pipes cast in gunmetal or galvanised iron. Chrome available to special order.



Gunmetal	Galvanised	Internal Dia		Height		Chain Size	
2633/GM/037	2633/GA/037	1½"	38mm	¾"	83mm	¼"	6mm
2633/GM/044	2633/GA/044	1¾"	44mm	3½"	92mm	⅝"	8mm
2633/GM/050	2633/GA/050	2"	50mm	4"	100mm	⅜"	9.5mm
2633/GM/062	2633/GA/062	2½"	64mm	4½"	114mm	7/16"	11mm
2633/GM/075	2633/GA/075	3"	75mm	5¼"	133mm	9/16"	14mm

## Hawse Pipes


Cast only in galvanised iron. The pipe is at an angle of approximately 50° to the flanges and the holes in the flanges are drilled to allow through bolting.



Galvanised	Pipe Dia		Bulwark Max Thickness	
2638/GA/075	3"	75mm	3"	75mm
2638/GA/100	4"	100mm	4"	100mm
2638/GA/125	5"	125mm	4¾"	120mm
2638/GA/150	6"	150mm	5½"	140mm

## Through Bulwark Fairleads

These fairleads are cast in gunmetal in two equal halves and supplied undrilled. For screw fixing the holes should be drilled un-aligned and for through bolting, or through riveting with copper nails, the holes should be aligned. After riveting with copper nails, careful polishing will render the fastenings almost invisible.



Gunmetal	Aperture Dimensions	Overall Size	Bulwark Thickness
2639/GM/110	2⅞" x 1¾" 60mm x 45mm	4¼" x 3¼" 108mm x 83mm	¾" 20mm
2639/GM/145	3½" x 2" 88mm x 50mm	5⅝" x 4⅞" 142mm x 105mm	1¼" 32mm

## Drain Plug

Cast in gunmetal with washer fitted. If leaving a dinghy or launch afloat, this fitting does allow for a positively closed drain.



Gunmetal	Bore		Cut-out Dia		Flange Diameter		Hull Thickness	
1441/GM/12	½"	12mm	¾"	19mm	1⅝"	42mm	⅝"	8mm
1441/GM/19	¾"	19mm	1"	25mm	2"	50mm	⅜"	10mm
1441/GM/25	1"	25mm	1⅜"	30mm	2⅛"	54mm	⅜"	10mm
1441/GM/32	1¼"	32mm	1½"	38mm	2½"	65mm	⅜"	10mm



## Deck Hardware & Exterior Fittings

### Rudder Gear

We have a large selection of rudder gear, in both polished gunmetal and galvanised iron, to suit a wide range of craft from small dinghies to larger day boats and small cruisers.



### Lightweight Rudder Gear

Available in gunmetal to suit lightweight dinghies up to about 8' long. This item is sold as a set, consisting of two transom gudgeons and two rudder pintles. The rudder pintles have an offset single strap, which can either be fitted to one side of a narrow rudder blade or within a wider one.

Gunmetal	Pintle Diameter	Length of Strap
1589/GM/WBI	5/16" 8mm	2 1/2" 64mm

Suitable for the wider rudder, this set is still relatively lightweight and ideal for the heavier, small to medium size dinghy.

Gunmetal	Pintle Diameter	Inside Strap Length		Inside Strap Width
		Gudgeon	Pintle	
1589/GM/MCN	5/16" 8mm	4" 100mm	2 1/2" 64mm	2 1/8" 54mm

### Standard Duty Rudder Gear

Available in cast and polished gunmetal in four sizes and galvanised iron in 1" strap width. Sold as a 4-part set.



Gunmetal	Galvanised	Pintle Diameter	Inside Strap Length		Inside Strap Width
			Gudgeon	Pintle	
1589/GM/019	-	7/16" 11mm	7/14" 185mm	4 1/4" 105mm	3/4" 19mm
1589/GM/025	1589/GA/025	1/2" 12mm	7" 175mm	4" 100mm	1" 25mm
1589/GM/044	-	1/2" 12mm	8 3/4" 210mm	5" 125mm	1 3/4" 44mm
1589/GM/056	-	1/2" 12mm	6 1/2" 165mm	6 1/2" 165mm	2 3/16" 56mm

### Heavy Duty Rudder Gear

Cast in gunmetal for the larger day boat or small cruiser, this range has heavy duty straps and 1/2" pins for additional strength. The rudder gudgeon is canted by approximately 3 degrees.



Part No.	Description	Pintle / Hole Diameter	Between Straps	Inside Strap Length
1916/GM	Rudder pintle	1/2" 12.5mm	4 7/8" 105mm	4" 100mm
1917/GM	Rudder pintle	1/2" 12.5mm	2 1/2" 65mm	4" 100mm
1918/GM	Rudder gudgeon	1/2" 12.5mm	2 1/2" 65mm	6" 150mm
1919/GM	Transom gudgeon	1/2" 12.5mm	-	-
1920/GM	Transom pintle	1/2" 12.5mm	-	-



## Tiller Fitting

Cast in gunmetal and ready to fit an insert appropriate to your rudder stock.



Gunmetal	Between Straps	Length Overall
1909/GM	1 <sup>5</sup> / <sub>16</sub> " 35mm	8" 200mm



NEW



## Gallows

Gunmetal	Item	Tube Size
9592/GM/32	8 <sup>1</sup> / <sub>4</sub> " Frame	1 <sup>1</sup> / <sub>4</sub> " 32mm
9592/GM/SKT/32	Small Socket	1 <sup>1</sup> / <sub>4</sub> " 32mm
9592/GM/39	9 <sup>1</sup> / <sub>2</sub> " Frame	1 <sup>1</sup> / <sub>2</sub> " 39mm
9592/GM/SKT/39	Large Socket	1 <sup>1</sup> / <sub>2</sub> " 39mm



## Boom Crutch Sockets

Gunmetal	Galvanised	Base Dims.	Inside Dims.
9591/GM	9591/GA	5 <sup>3</sup> / <sub>8</sub> " x 2 <sup>3</sup> / <sub>4</sub> " 137 x 68mm	2 <sup>1</sup> / <sub>2</sub> " x 1" 64 x 25mm




## Bronze Centreboard Winch

Drum Diameter	8 <sup>3</sup> / <sub>4</sub> "	220mm
Shaft Diameter	1 <sup>3</sup> / <sub>16</sub> "	22mm
Base Jaw Width	2 <sup>7</sup> / <sub>8</sub> "	72mm
Base Jaw Length	6 <sup>1</sup> / <sub>4</sub> "	158mm
Power Advantage	10:1	

Part No. 3769/GM

## Keel or Rubbing Band

Available in brass or galvanised iron with feather edge rather than the thicker half round style. Supplied in lengths of approximately 3 metres.

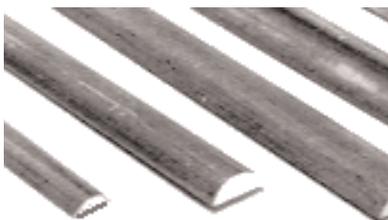

Brass	Width	Thickness
5081/BR/010	3 <sup>3</sup> / <sub>8</sub> " 10mm	1 <sup>1</sup> / <sub>8</sub> " 3mm
5081/BR/012	1 <sup>1</sup> / <sub>2</sub> " 12mm	1 <sup>1</sup> / <sub>8</sub> " 3mm
5081/BR/015	5 <sup>5</sup> / <sub>8</sub> " 15mm	3 <sup>3</sup> / <sub>16</sub> " 5mm
5081/BR/019	3 <sup>3</sup> / <sub>4</sub> " 20mm	3 <sup>3</sup> / <sub>16</sub> " 5mm
5081/BR/025	1" 25mm	3 <sup>3</sup> / <sub>16</sub> " 5mm
Galvanised		
5087/GA/019	3 <sup>3</sup> / <sub>4</sub> " 20mm	1 <sup>1</sup> / <sub>4</sub> " 6mm
5087/GA/025	1" 25mm	1 <sup>1</sup> / <sub>4</sub> " 6mm
5087/GA/031	1 <sup>1</sup> / <sub>4</sub> " 32mm	1 <sup>1</sup> / <sub>4</sub> " 6mm
5087/GA/037	1 <sup>1</sup> / <sub>2</sub> " 38mm	1 <sup>1</sup> / <sub>4</sub> " 6mm
5087/GA/050	2" 50mm	3 <sup>3</sup> / <sub>8</sub> " 10mm



# Deck Hardware & Exterior Fittings

## Bronze Stanchions

Cast in gunmetal and with a polished finish, these tapered stanchions are 1" diameter at the base and are available in three heights. A separate triangular base fitting suits all three stanchions.



STANCHIONS		
Gunmetal	Height	
1655/GM/500	19½"	500mm
1655/GM/625	24½"	625mm
1655/GM/750	29½"	750mm
BASE		
1657/GM	2½"	65mm




## Bronze Stanchions with Fixed Base

We can supply two models cast in one piece. Pattern 1652 is with a round base and pattern 1653 has a heavy duty square base with upstand to allow fixing to deck and wash strake or toerail.

Gunmetal	Height		Holes	Base Dims	
1652/GM/457	18"	457mm	1	3"	75mm Diameter
1653/GM/480	18½"	480mm	1	3¾" x 2¼"	95 x 57mm
1653/GM/700	27½"	700mm	2	3¾" x 2⅝"	95 x 67mm

## Rail Hinge


Cast in gunmetal and polished.

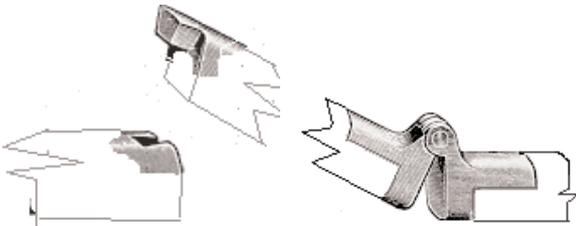

Gunmetal	To Suit Rail Size
8956/GM/082	3¼" x 1¼" 82 x 44mm
8956/GM/094	3¼" x 1½" 95 x 38mm

## Handrail Stanchions

Cast in brass with a choice of heavy duty or a lighter pattern, these stanchions are available as open brackets and with closed ends. All types can be supplied chrome plated to special order.



### Heavy Duty

Open	Closed	Rail Diameter	Base Dia	Height	Fastenings
1663/BR/31	1664/BR/31	1¼" 32mm	2¼" 58mm	2¾" 70mm	4 off No 10
1663/BR/37	1664/BR/37	1½" 38mm	2¼" 58mm	3" 78mm	4 off No 10




### Lighter Pattern

Open	Closed	Rail Diameter	Base Dia	Height	Fastenings
0470/BR	0471/BR	1⅜" 30mm	2⅝" 67mm	2¾" 70mm	3 off No 8



## Flagstaff Sockets

Available in polished gunmetal or galvanised, raked or straight. The 9575 pattern is raked and has a cast cleat and button.



### Straight

Gunmetal	Galvanised	Staff Dia		Base Dia		Height		Fastenings	
9570/GM/016	-	5/8"	16mm	2 1/4"	58mm	2 1/4"	58mm	4 off	No 8
9570/GM/019	9570/GA/019	3/4"	19mm	2 1/4"	58mm	2 1/2"	63mm	4 off	No 8
9570/GM/025	9570/GA/025	1"	25mm	2 1/2"	63mm	2 7/8"	72mm	4 off	No 8
9570/GM/031	9570/GA/031	1 1/4"	31mm	3"	75mm	2 7/8"	72mm	4 off	No 8



### Raked

Gunmetal	Galvanised	Staff Dia		Base Dia		Height		Fastenings	
9571/GM/019	9571/GA/019	3/4"	19mm	2 1/4"	58mm	2 1/2"	65mm	4 off	No 8
9571/GM/025	9571/GA/025	1"	25mm	2 1/2"	63mm	2 3/4"	70mm	4 off	No 8
9571/GM/031	9571/GA/031	1 1/4"	31mm	3"	75mm	2 3/4"	70mm	4 off	No 10



### Raked with Cleat and Button

Gunmetal	Staff Dia		Base Dia		Height		Fastenings	
9575/GM/025	1"	25mm	3"	75mm	2 3/4"	70mm	4 off	No 8
9575/GM/031	1 1/4"	31mm	3 1/2"	90mm	3 3/8"	78mm	4 off	No 10
9575/GM/037	1 1/2"	38mm	3 3/4"	95mm	3 1/2"	90mm	4 off	No 10

## Dutch Style Flagstaff Sockets

Designed for traditional Dutch Vessels, these gunmetal flagstaff sockets are mounted on the trailing edge of the rudder. The mounting faces are slightly curved to allow for the rudder shape.



9567



9569




9568

Gunmetal	Type	Staff Diameter		Length O.A.	Fastenings	
9567/GM/034	Upright	1 1/4"	34mm	7 3/4"	3 off	No.8
9568/GM/025	Raked	1"	25mm	5 1/4"	3 off	No.8
9569/GM/034	Raked	1 1/4"	25mm	7 3/4"	3 off	No.8

## Engine Control Lever

A simple but well proven engine control lever with an effective twist lock action. Available in polished brass or chrome plated.



Brass	Chrome	Base Dimensions		Height
9626/BR	9626/CP	3 1/2" x 7/8"		5"
		90 x 22mm		125mm



# Deck Hardware & Exterior Fittings

## Binnacle Rings

Cast in brass or galvanised iron. Note that the corner detail varies with material.



8781/BR



Corner detail for galvanised rings

	Brass	Galvanised	Base Size	
	8781/BR	-	2½ x 2"	64 x 50mm
	-	8781/GA/056	2¼ x 1¾"	57 x 44mm
	-	8781/GA/069	2¾ x 2½"	70 x 54mm

## Lacing Hooks and Eyes

The low profile pattern is cast in gunmetal and the standard pattern stamped in brass. Both are also available in a chrome plate finish.

### Low Profile



	Gunmetal	Chrome	Length		Width		Height	
Hook	9502/GM	9502/CP	1¾"	45mm	⅝"	16mm	⅝"	8mm
Eye	9504/GM	9504/CP	1⅝"	41mm	⅞"	11mm	⅜"	9mm

### Standard Pattern



	Brass	Chrome	Length		Width		Height	
Eye	9507/BR	9507/CP	1¾"	45mm	⅞"	13mm	½"	12mm
Hook	9508/BR	9508/CP	1⅝"	41mm	⅝"	16mm	⅞"	11mm

## Stanchion Eyebolt/Tensioner

Cast brass eyes with a stainless steel stud.



	Stud Length	Stud Dia	Eye ID
1779/BR	2¾" 70mm	⅝" 8mm	1⅞" 17mm

## Mooring or Bow Eye


A heavy duty cast brass eye complete with stainless steel stud.



	Stud Length	Stud Dia	Eye ID
1780/BR	3" 75mm	⅜" 10mm	1" 25mm

## Fender Eye Plates

Available in square or diamond pattern, in barrelled gunmetal, polished gunmetal, chrome plate and galvanised finishes.



Square Pattern with 4 fixing holes		Eye Dia	Base Dims	Fastenings
9384/CP	Chrome Plated	¾" 19mm	1¾" x 1⅞" 44mm x 37mm	4 off No. 8
9384/GA	Galvanised Iron			
9384/GM	Gunmetal			
9384/GM/POL	Polished Gunmetal			



Diamond Pattern with 2 fixing holes		Eye Dia	Base Dims	Fastenings
9385/CP	Chrome Plated	½" 13mm	1⅞" x 1⅞" 28mm x 28mm	2 off No. 8
9385/GA	Galvanised Iron			
9385/GM	Gunmetal			
9385/GM/POL	Polished Gunmetal			

# Deck Hardware & Exterior Fittings



## Silicon Bronze Eyebolts

NEW



	Shaft Diameter		Shaft Length		Eye I.D.	
1707/SB/08	3/16"	8mm	3 1/2"	32mm	7/16"	11mm
1707/SB/10	3/8"	10mm	4"	100mm	1/2"	12mm
1707/SB/12	1/2"	12mm	4 1/2"	11.5mm	1/2"	13mm

## Galvanised Eyebolts and Screws



	Type	Shank dia		Shank length		Eye ID	
1708/GA/06	bolt	1/4"	6mm	2 1/2"	64mm	3/8"	10mm
1708/GA/08	bolt	5/16"	8mm	4 1/4"	108mm	3/8"	10mm
1708/GA/10	bolt	3/8"	10mm	4 1/2"	114mm	7/16"	11mm
1708/GA/12	bolt	1/2"	12mm	5 1/4"	133mm	1 1/16"	18mm
1708/GA/16	bolt	5/8"	16mm	6"	150mm	7/8"	22mm
1708/GA/20	bolt	3/4"	20mm	6 1/2"	165mm	1"	25mm
1709/GA/06	screw	1/4"	6mm	2"	50mm	3/8"	10mm
1709/GA/08	screw	5/16"	8mm	2 1/2"	64mm	7/16"	11mm
1709/GA/10	screw	3/8"	10mm	3"	75mm	1/2"	12mm
1709/GA/12	screw	1/2"	12mm	4"	100mm	9/16"	14mm

## Galvanised Ringbolts and Screws



	Type	Shank dia		Shank length		Ring ID	
1774/GA/06	bolt	1/4"	6mm	2 1/2"	64mm	1 3/4"	44mm
1774/GA/08	bolt	5/16"	8mm	4 1/4"	108mm	2"	50mm
1774/GA/10	bolt	3/8"	10mm	4 1/2"	114mm	2 1/2"	64mm
1774/GA/12	bolt	1/2"	12mm	5 1/4"	133mm	2 1/2"	64mm
1774/GA/16	bolt	5/8"	16mm	6"	150mm	3"	75mm
1774/GA/20	bolt	3/4"	20mm	6 1/2"	165mm	3 1/2"	75mm
1773/GA/06	screw	1/4"	6mm	2"	50mm	1 1/2"	38mm
1773/GA/08	screw	5/16"	8mm	2 1/4"	57mm	1 3/4"	44mm
1773/GA/10	screw	3/8"	10mm	3"	75mm	2"	50mm
1773/GA/12	screw	1/2"	12mm	4"	100mm	2 1/2"	64mm

## Ringbolt

Cast in brass and available in brass or chrome plate finish.



Brass	Chrome	Shank dia		Shank Length		Ring ID	
0631/BR	0631/CP	3/8"	10mm	2 1/8"	55mm	1 1/4"	32mm
0630/BR	0630/CP	1/2"	12mm	2 3/4"	72mm	1 3/4"	45mm



## Boarding Ladder Fittings

Supplied in polished gunmetal and sold as a 4-piece set. Brass hinges for longer ladders and spare eyes also available.

Part No.	Item
9622/GM/SET	Complete Set
9622/GM/E	Spare Eyes
9622/BR/H	Brass Hinges



# Deck Hardware & Exterior Fittings

## Stemhead Fittings

The Davey range of bow fittings will suit craft from dinghies to substantial keel boats and work boats. Manufactured in gunmetal and galvanised iron, they suit a chain range from ¼" to ½".



### Stemhead Fitting

Cast in gunmetal with a polished finish, this strong stemhead fitting takes the load down the front of the stem and is suitable for craft up to around 18 foot.

Gunmetal	Inside Length	Inside Angle	Width	Height Above Stem
3727/GM	6" 150mm	85 degrees	1" 25mm	1½" 34mm



### Lightweight Stemhead Fitting

Cast in gunmetal this stemhead fitting is suitable for dinghies up to around 12 foot.

Gunmetal	Length	Front Strap	Width
3729/GM	4¼" 110mm	2½" 60mm	¾" 20mm



### Side Fitting Stemhead Roller

Available in gunmetal or galvanised iron to suit chain from ¼" to ⅜". The outer cheek curves inwards to help chain retention. Can be screwed or through bolted to the stem.

Gunmetal	Galvanised	Length	Width	Chain Size	Roller Size
1108/GM/08	1108/GA/08	6½" 156mm	2" 50mm	⅝" 8mm	2" x 1½" 50 x 38mm
1108/GM/10	1108/GA/10	7⅞" 183mm	2½" 62mm	⅜" 10mm	2½" x 1¾" 62 x 44mm



### Side Fitting Stemhead Roller-Through Bolt

In galvanised iron only, this rugged fitting has a higher outer cheek and fixing bolt through the brass bushed roller.

Galvanised	Length	Width	Chain Size	Roller Size
1106/GA/08	7½" 190mm	1½" 38mm	⅝" 8mm	1½" x 1¼" 38 x 32mm



### Centre Fitting Stemhead Roller

In gunmetal and galvanised iron this fitting will suit a wide variety of foredecks. The base of the larger size has a small lip to the front.

Gunmetal	Galvanised	Roller Size	Base Length	Base Width
1125/GM/06	1125/GA/06	1¾" x 1¼" 45 x 32mm	4½" 110mm	3⅞" 75mm
1125/GM/08	1125/GA/08	2" x 1½" 50 x 38mm	4" 100mm	3¾" 95mm



## Rowlocks

We have a wide variety of galvanised and gunmetal rowlocks to suit most rowing craft. All come complete with sockets, which we also list separately for ordering as spares or additions. Please note that we supply rowlocks as singles, **not** as pairs.

### Galvanised



**1042**  
Ordinary Pattern



**1049**  
Even Top



**1051/GA**



< **1057** >

	Jaw Width		Stem Diameter	
<b>1042/GA/50/10</b>	2"	50mm	3/8"	10mm
<b>1042/GA/50/12</b>	2"	50mm	1/2"	12mm
<b>1042/GA/56/11</b>	2 1/4"	56mm	7/16"	11mm
<b>1042/GA/62/12</b>	2 1/2"	62mm	1/2"	12mm
<b>1042/GA/62/16</b>	2 1/2"	62mm	5/8"	16mm
<b>1042/GA/75/19</b>	3"	75mm	3/4"	19mm

<b>1049/GA/50/10</b>	2"	50mm	3/8"	10mm
<b>1049/GA/50/12</b>	2"	50mm	1/2"	12mm
<b>1049/GA/56/11</b>	2 1/4"	56mm	7/16"	11mm
<b>1049/GA/62/12</b>	2 1/2"	62mm	1/2"	12mm
<b>1049/GA/62/16</b>	2 1/2"	62mm	5/8"	16mm

### Captive Rowlocks

<b>1057/GA/50/12</b>	2"	50mm	1/2"	12mm
<b>1057/GA/62/12</b>	2 1/2"	62mm	1/2"	12mm

### Sockets

Top Mount Socket	Side Mount Socket	Stem Diameter
<b>1046/GA/10</b>	<b>1051/GA/10</b>	3/8"
<b>1046/GA/11</b>	<b>1051/GA/11</b>	7/16"
<b>1046/GA/12</b>	<b>1051/GA/12</b>	1/2"
<b>1046/GA/16</b>	–	5/8"
<b>1046/GA/19</b>	–	3/4"

### Gunmetal



**1056**



**1066**

**1040**

**NEW**



**1051/GM**



**1910/GM**

< **1050** >

Gunmetal rowlocks are a delightful addition to any fine rowing craft. It should be noted however that as this is a softer material it is not suitable for heavy rowing. If additional strength is required, moving up to a larger size would be worth considering.

	Jaw Width		Stem Diameter	
<b>1066/GM/45</b>	1 3/4"	45mm	7/16"	11mm
<b>1066/GM/50</b>	2"	50mm	1/2"	12mm
<b>1040/GM</b>	2 1/2"	62mm	5/8"	16mm
<b>1056/GM</b>	1 5/8"	42mm	9/16"	15mm
<b>1049/GM/50</b>	2"	50mm	1/2"	12mm

### Captive Rowlocks

<b>1050/GM</b>	2"	50mm	1/2"	12mm
----------------	----	------	------	------

### Sockets

Top Mount Socket	Side Mount Socket	Stem Diameter
<b>1066/GM/SKT</b>	<b>1051/GM</b>	1/2"
<b>1040/GM/SKT</b>	–	5/8"
–	<b>1910/GM</b>	1/2"




# Deck Hardware & Exterior Fittings

## Boathooks and Staves

Boathook ends are supplied in polished gunmetal or galvanised iron and are all cast except for 1015, which is fabricated from sheet steel.



Gunmetal	Galvanised	Length	Stave Dia
1000/GM	-	6" 150mm	1 1/4" 32mm
-	1001/GA/150	6" 150mm	1 1/8" 29mm
1001/GM/200	1001/GA/200	8" 200mm	1 1/2" 38mm
1001/GM/250	1001/GA/250	10" 250mm	1 1/2" 38mm
-	1015/GA/200	8" 200mm	1 1/2" 38mm
-	1015/GA/250	10" 250mm	1 1/2" 38mm
-	1015/GA/300	12" 300mm	1 3/4" 44mm
-	1015/GA/350	14" 350mm	2" 50mm
1018/GM/150	1018/GA/150	6" 150mm	1 1/4" 32mm
1018/GM/200	1018/GA/200	8" 200mm	1 1/2" 38mm
1019/GM/200	1019/GA/200	8" 200mm	1 1/2" 38mm

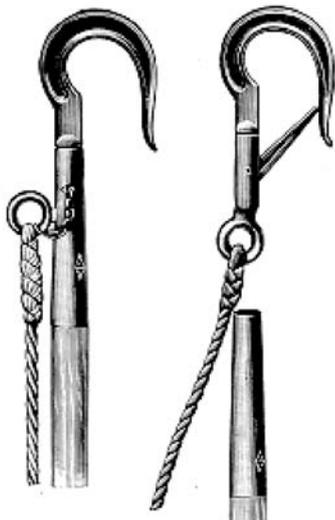

### 'Grabit' Boathook

The original, and still the best boathook for attaching a line to a mooring buoy or ring. Cast in aluminium bronze, which is as tough as steel, one sweep with the grabit leaves the boat secure whilst a permanent mooring is attached.

	Length		For Stave Dia.	
1025/AB/250	10"	250mm	1 1/2"	38mm

### Boathook Staves

Made from the finest quality ash, one end is rounded and the other is left plain for fitting to the boathook head.

	Length		Diameter			Length		Diameter	
1012/OO/1800/28	6'	1800mm	1 1/8"	29mm	1012/OO/3000/37	10'	3000mm	1 1/2"	38mm
1012/OO/1800/32	6'	1800mm	1 1/4"	32mm	1012/OO/3600/37	12'	3600mm	1 1/2"	38mm
1012/OO/2400/32	8'	2400mm	1 1/4"	32mm	1012/OO/4200/37	14'	4200mm	1 1/2"	38mm
1012/OO/2400/37	8'	2400mm	1 1/2"	38mm	1012/OO/4800/37	16'	4800mm	1 1/2"	38mm
1012/OO/3000/32	10'	3000mm	1 1/4"	32mm					



### Boat Badge

The finishing touch for a small dinghy or launch, this badge is sandblasted ready for painting. Traditionally, the hollow centre would frame a miniature picture of the club or owners burgee.

	Outside Oval		Inside Oval	
9525/BR	5 1/2" x 4 1/2"	138mm x 110mm	3 1/2" x 2 1/2"	90mm x 65mm